
AGGREGATE MONOLITHOS COLLECTION



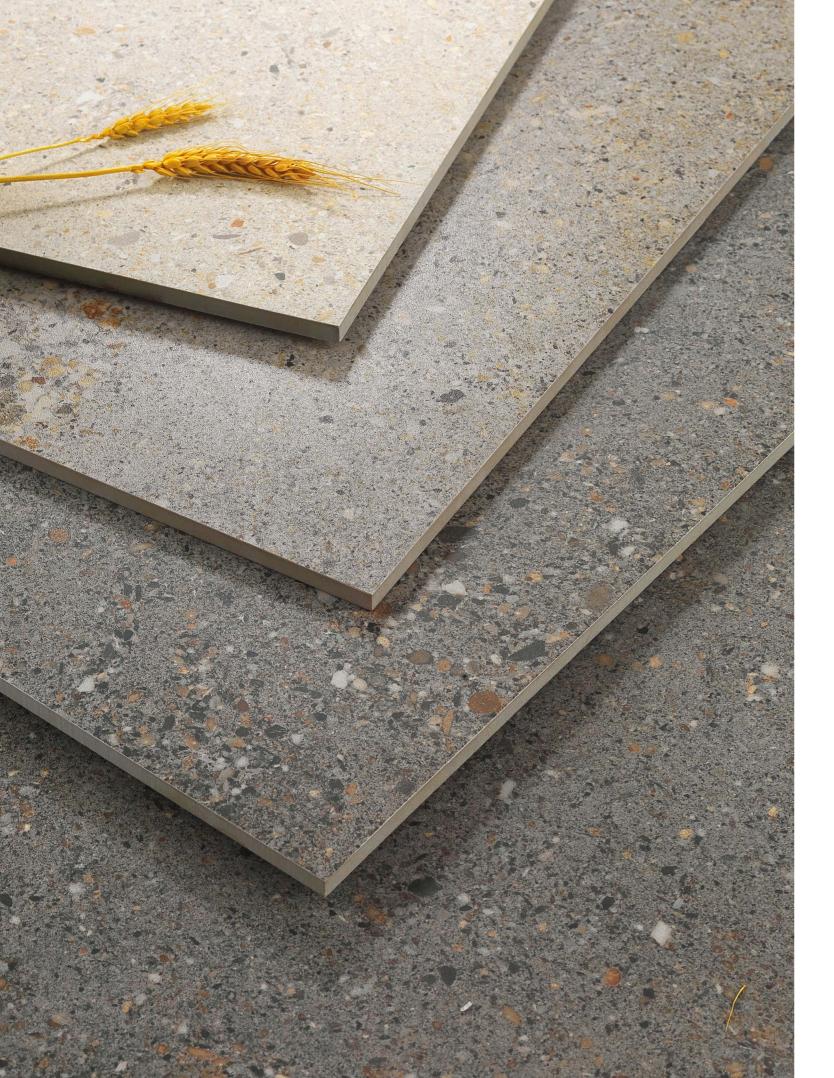

MONOLITHOS COLLECTION

Aggregate is the designers' dream tile with multiple sizes, colours and finished. Avaible in SmoothGrip finish for indoor and outdoor domestic and light commercial applications and attractive Lappato finish. The colour pallet is on trend. Rectified edges complete a thoroughly modern product.

AGGREGATE WHITE







AGGREGATE **DARK GREY**











SMOOTH GRIP



WATER

*Tiles may vary in sizing, weight, colour, pattern, veining, texture, durability, density, surface and finish from batch to batch. Slip ratings serve as an indication and may vary for each batch of tiles. It is recommended that a new test be performed for each batch of tiles if a slip rating certificate is required. The product images shown are for illustration purposes only and are not an exact representation of the product.

MONOLITHOS COLLECTION



RANDOM

SHADE VARIATION



60x60 30x60



LAPPATO

RESISTANCE



WATER ABSORPTION

SMOOTH₁

Our new SmoothGrip finish uses the latest nano-surface technology to produce a smooth surface, with a high degree of slip resistance. This new surface provides a durable, tactile, low maintenance finish with aesthetic appeal, without sacrificing safety.

DECO TILES



ARROW ▶24.4X28.3cm




HERRINGBONE ▶24.8X29.5cm





FRENCH PATTERN

AGGREGATE **WHITE**

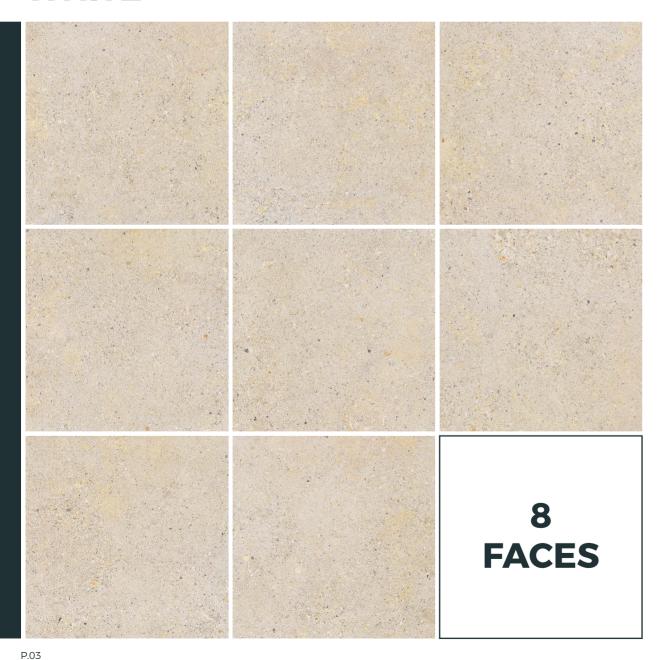

MATT[‡] -SMOOTH GRIP SURFACE







►Smooth grip - P4 ►30x30cm / 12"x12" ►Rectified

LAPPATO SURFACE



AGG WHT60L



AGG WHT36L



MONOLITHOS COLLECTION

















WATER ABSORPTION

RANDOM VARIATION

SMOOTH GRIP LAPPATO

RESISTANCE

AGGREGATE **WHITE**



FRENCH PATTERN
►120X120cm





P.05 P.06

MONOLITHOS COLLECTION



RANDOM



60x60



SMOOTH GRIP LAPPATO

RESISTANCE



WATER ABSORPTION

SMOOTH₁

Our new SmoothGrip finish uses the latest nano-surface technology to produce a smooth surface, with a high degree of slip resistance. This new surface provides a durable, tactile, low maintenance finish with aesthetic appeal, without sacrificing safety.

DECO TILES



ARROW ▶24.4X28.3cm



HERRINGBONE ▶24.8X29.5cm




HEXAGON



FRENCH PATTERN

AGGREGATE LIGHT GREY

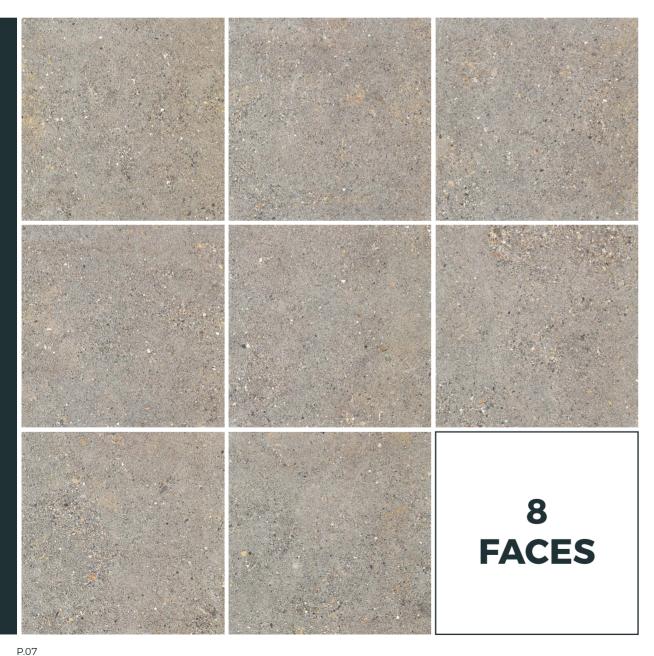

MATT[‡] -SMOOTH GRIP SURFACE





►Smooth grip - P4 ►30x60cm / 12*x24* ►Rectified



►Smooth grip - P4 ►30x30cm / 12"x12" ►Rectified

LAPPATO SURFACE



AGG LGY60L



AGG LGY36L



MONOLITHOS COLLECTION



RANDOM













SMOOTH GRIP LAPPATO

RESISTANCE

WATER ABSORPTION


AGGREGATE LIGHT GREY





+ **ARROW**►24.4X28.3cm

►Lappato ►60x60cm / 24*x24* ►Rectified

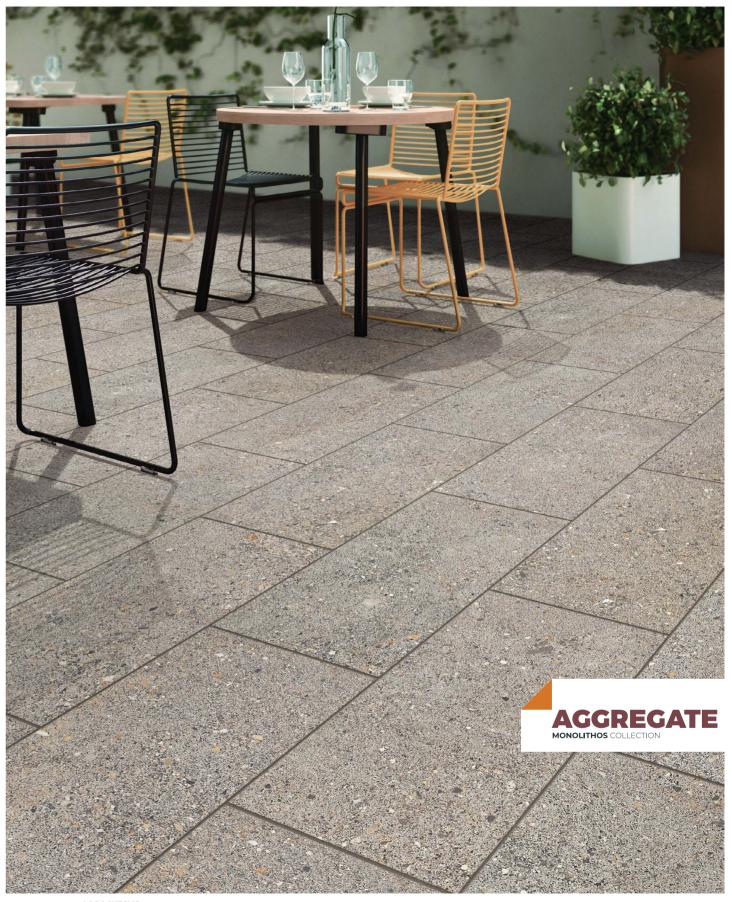

P.10

- AGG LGY36MS
 Smooth grip P4
 30x60cm / 12"x24"
 Rectified

P.09

MONOLITHOS COLLECTION







SMOOTH GRIP LAPPATO

RESISTANCE

WATER ABSORPTION

SMOOTH₁

Our new SmoothGrip finish uses the latest nano-surface technology to produce a smooth surface, with a high degree of slip resistance. This new surface provides a durable, tactile, low maintenance finish with aesthetic appeal, without sacrificing safety.

DECO TILES









FRENCH PATTERN

AGGREGATE DARK GREY



MATT[‡] -SMOOTH GRIP SURFACE





►Smooth grip - P4 ►30x60cm / 12"x24" ► Rectified



►Smooth grip - P4 ►30x30cm / 12"x12" ►Rectified

LAPPATO SURFACE



AGG DGY60L



AGG DGY36L



►Lappato ►30x30cm / 12"x12" ►Rectified

P.12

MONOLITHOS COLLECTION



RANDOM



VARIATION









RESISTANCE



WATER ABSORPTION

AGGREGATE DARK GREY



AGG DGY60L +

AGG DGY36L ►Lappato ►30x60cm / 12"x24" ►Rectified

▶29.8X29.8cm

AGGREGATE MONOLITHOS COLLECTION



P.13 P.14

TECHNICAL STANDARDS_AGGREGATE

TECHNICAL CHARACTERISTICS	TEST METHOD	STANDARD	NEX-GEN						
MEASUREMENT & SURFACE APPEARANCE									
LENGTH AND WIDTH	EN ISO 10545-2	±0.6%	+0.02% ~+0.03%						
LENGTH AND WIDTH	LIV 130 10343-2	±2mm	-0.1 ~+0.2mm						
THICKNESS	EN ISO 10545-2	±5%	+2.2% ~+4.4%						
		±0.5mm	+0.2 ~+0.4mm						
STRAIGHTNESS OF SIDES	EN ISO 10545-2	±0.5%	-0.05% ~+0.02%						
		±1.5mm	-0.29mm ~+0.13mm						
PHYSICAL PROPERTIES									
WATER ABSORPTION	EN ISO 10545-3	≤0.5%	≤0.1%						
BREAKING STRENGTH	EN ISO 10545-4	≥1300N	2182N						
MODULUS OF RUPTURE	EN ISO 10545-4	≥35N/mm²	45Mpa						
RESISTANCE TO ABRASION	EN ISO 10545-7	REPORT TO ABRASION CLASS	Class 3						
		REPORT CYCLES PASSED	1,500r						
THERMAL SHOCK RESISTANCE	EN ISO 10545-9	NO DEFECT SHOULD BE VISIBLE	PASS						
FROST RESISTANCE	EN ISO 10545-12	NO SURFACE DEFECTS OR CRACKS SHOULD BE VISIBLE	PASS						
SLIDER 96 SLIP RESISTANCE WET PENDULUM TEST SMOOTH GRIP	ACCORDING TO AS 4586:2013	-	P4						
CHEMICAL PROPERTIES									
CHEMICAL RESISTANCE TO HOUSEHOLD CHEMICALS & SWIMMING POOL SALTS	EN ISO 10545-13	MINIMUM GB	GA						
RESISTANCE TO STAINING	EN ISO 10545-14	MINIMUM CLASS 3	CLASS 5						

PACKING DETAILS

SERIES	SIZES	PCS/CTN	M ² /CTN	KG/CTN	CTN / PLT	M ² /PLT	KG/PLT
AGGREGATE	60x60 / 24"x24"	4	1.44	31.5	40	57.6	1260
	30x60 / 12"x24"	8	1.44	31.5	40	57.6	1260
	30x30 / 12"x12" For Indent	12	1.08	23	56	60.48	1288

















FOSHAN NEX-GEN BUILDING MATERIALS CO., LTD.

Unit 1409-1415, Block 2, XingFa Tower, No. 125 Jihua West Road, Chancheng District, Foshan City, Guangdong, Province, China 528000

T +86 757 8533 6182 E doreen@fsmissippi.com Mobile/WhatsApp/WeChat +86 139 2993 5503

