

90+ | 素色肌肤砖



Traven Cave



90+ | 素色肌肤砖

广东省佛山市禅城区叠滘西路60号
欧洲工业园二座三层自编之C区
C Area, Level 3, Building 2, European Industrial Park,
No. 60, West Langbao Road, Foshan City,
Guangdong Province, P.R. China

90+



Traver cave series has clear stripes and natural holes restored by the mold, creates a full sense of three-dimensional. It can achieve P4 anti-slip rate, making the tile surface safer.

It is made of environment-friendly materials, with three colors available. One stone has different patterns and various textures, bringing rich visual experience. It is not only suitable for paving at home, but also can be used in various commercial places and public places.

OFF-WHITE

60TC20R/URD
T60TC20URD
600x600mm
612TC20R
600x1200mm

GREY

60TC21R/URD
T60TC21URD
600x600mm
612TC21R
600x1200mm

BEICE

60TC22R/URD
T60TC22URD
600x600mm
612TC22R
600x1200mm



The bright off white is pure and clean, with different hole textures and overlapping textures, bringing the natural landscape into the space.

OFF-WHITE

60TC20R/URD

T60TC20URD

600x600mm

612TC20R

600x1200mm



FLOOR:60TC20R/URD





The silver grey color has a mysterious temperament, which shows its dignity in the space. You can feel the beauty of nature without leaving home.

SILVER GREY

60TC21R/URD
T60TC21URD
600x600mm
612TC21R
600x1200mm



FLOOR: 612TC21R
FLOOR: 612TC22R





WALL:612TC21R
FLOOR:612TC22R



Ivory color brings a warm feeling to people. Every detail is perfect. The texture of the cave stone is perfectly reproduced, bringing both visual and tactile enjoyment.

BEIGE

60TC22R/URD

T60TC22URD

600x600mm

612TC22R

600x1200mm




FLOOR:60TC22R/URD







COLOURS




OFF-WHITE
 60TC20R/URD
 T60TC20URD
 600x600mm




SILVER GREY
 60TC21R/URD
 T60TC21URD
 600x600mm




BEIGE
 60TC22R/URD
 T60TC22URD
 600x600mm

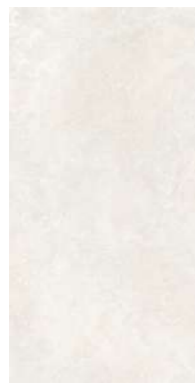

OFF-WHITE
 612TC20R
 600x1200mm

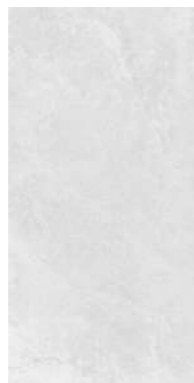


SILVER GREY
 612TC21R
 600x1200mm

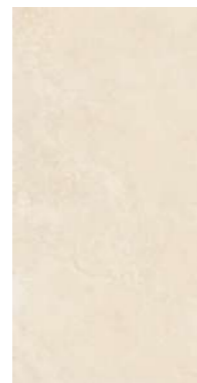

BEIGE
 612TC22R
 600x1200mm

PRODUCT FEATURE / SURFACE APPLICATION / INSTALLATION GUIDANCE

V4 TEXTURE RATING	MIN. LAYING GAP 3mm	RECTIFIED	STRUCTURE	WALL TILES	FLOOR TILES	COLOURS	SIZES	SURFACES
----------------------	---------------------	-----------	-----------	------------	-------------	---------	-------	----------

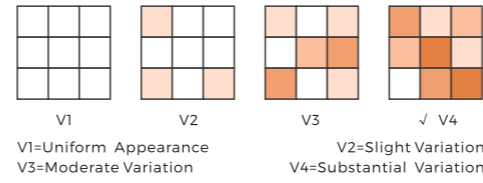

TECHNICAL SPECIFICATION

MEASUREMENT AND SURFACE APPEARANCE	STANDARD PRESCRIBED VALUES	90+ VALUES	90+ VALUES
Dimensions & Surface Quality			
Length and Width	±0.6% max.	-0.03-0.03%	-0.03-0.03%
Thickness	±5% max.	9.0-9.5mm	11.0-11.5mm
Orthogonality	±0.5% max.	-0.06-0.07%	-0.06-0.07%
Straightness of sides	±0.5% max.	-0.06-0.07%	-0.02-0.03%
Surfaces flatness	±0.5% max.	-0.05-0.07%	-0.09-0.11%
Physical Properties			
Water absorption	≤0.5%	≤0.5%	≤0.5%
Breaking strength	≥1300N	2265N	4031N
Bending resistance	≥35N/mm ²	38N/mm ²	40N/mm ²
Resistance to deep abrasion	≤175mm ³	Class 4	Class 4
Temperature shock resistance	No visible crack	No visible crack	Durable
Resistance to frost	No visible crack	No visible crack	No visible crack
Non-slip	R9-R11	R11	R11
Colour resistance to light	no colour changes	no colour changes	no colour changes
Chemical Properties			
Chemical resistance	no visible changes when subjected to chemicals	Durable	Durable
Resistance to staining	≥3	Class 5	Class 5

PACKING DETAILS

SIZES	SURFACE	PCS/CTN	M ² /CTN	KG/CTN
600x600mm	✓	4	1.44	31.5
600x1200mm	✓	2	1.44	43