




Dijon

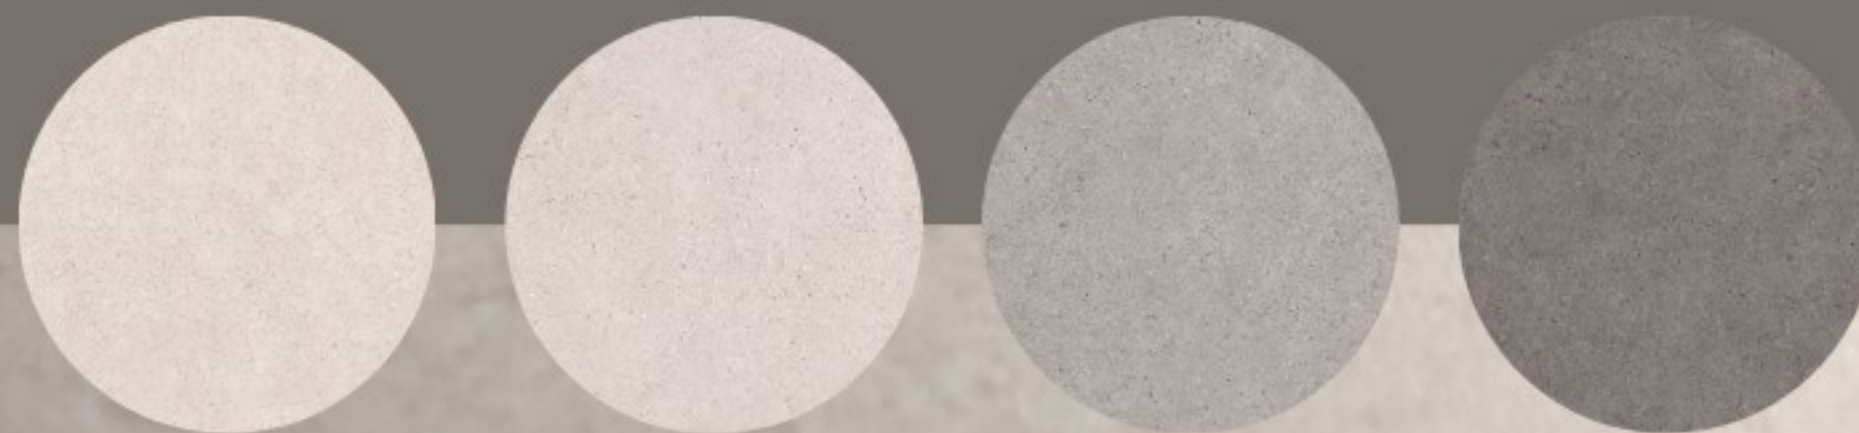


PRODUCT COLOR SCHEME

Dijon tiles, with their natural, timeless look and subtle textures, add a touch of elegance and warmth to any space. Available in 4 colours that ensures that the space feels refreshing and inviting every time you see it.



600x600mm



300x300mm



Finishes:
Matt





Dijon

Ivory



Size:

300x300mm / 600x600mm

Finishes:

Matt

Thickness:

≡ 9mm



600x600mm

Mosaic:


300x300mm

12

600x600mm
PATTERNS

Size:
600x600mm

Finishes:
Matt

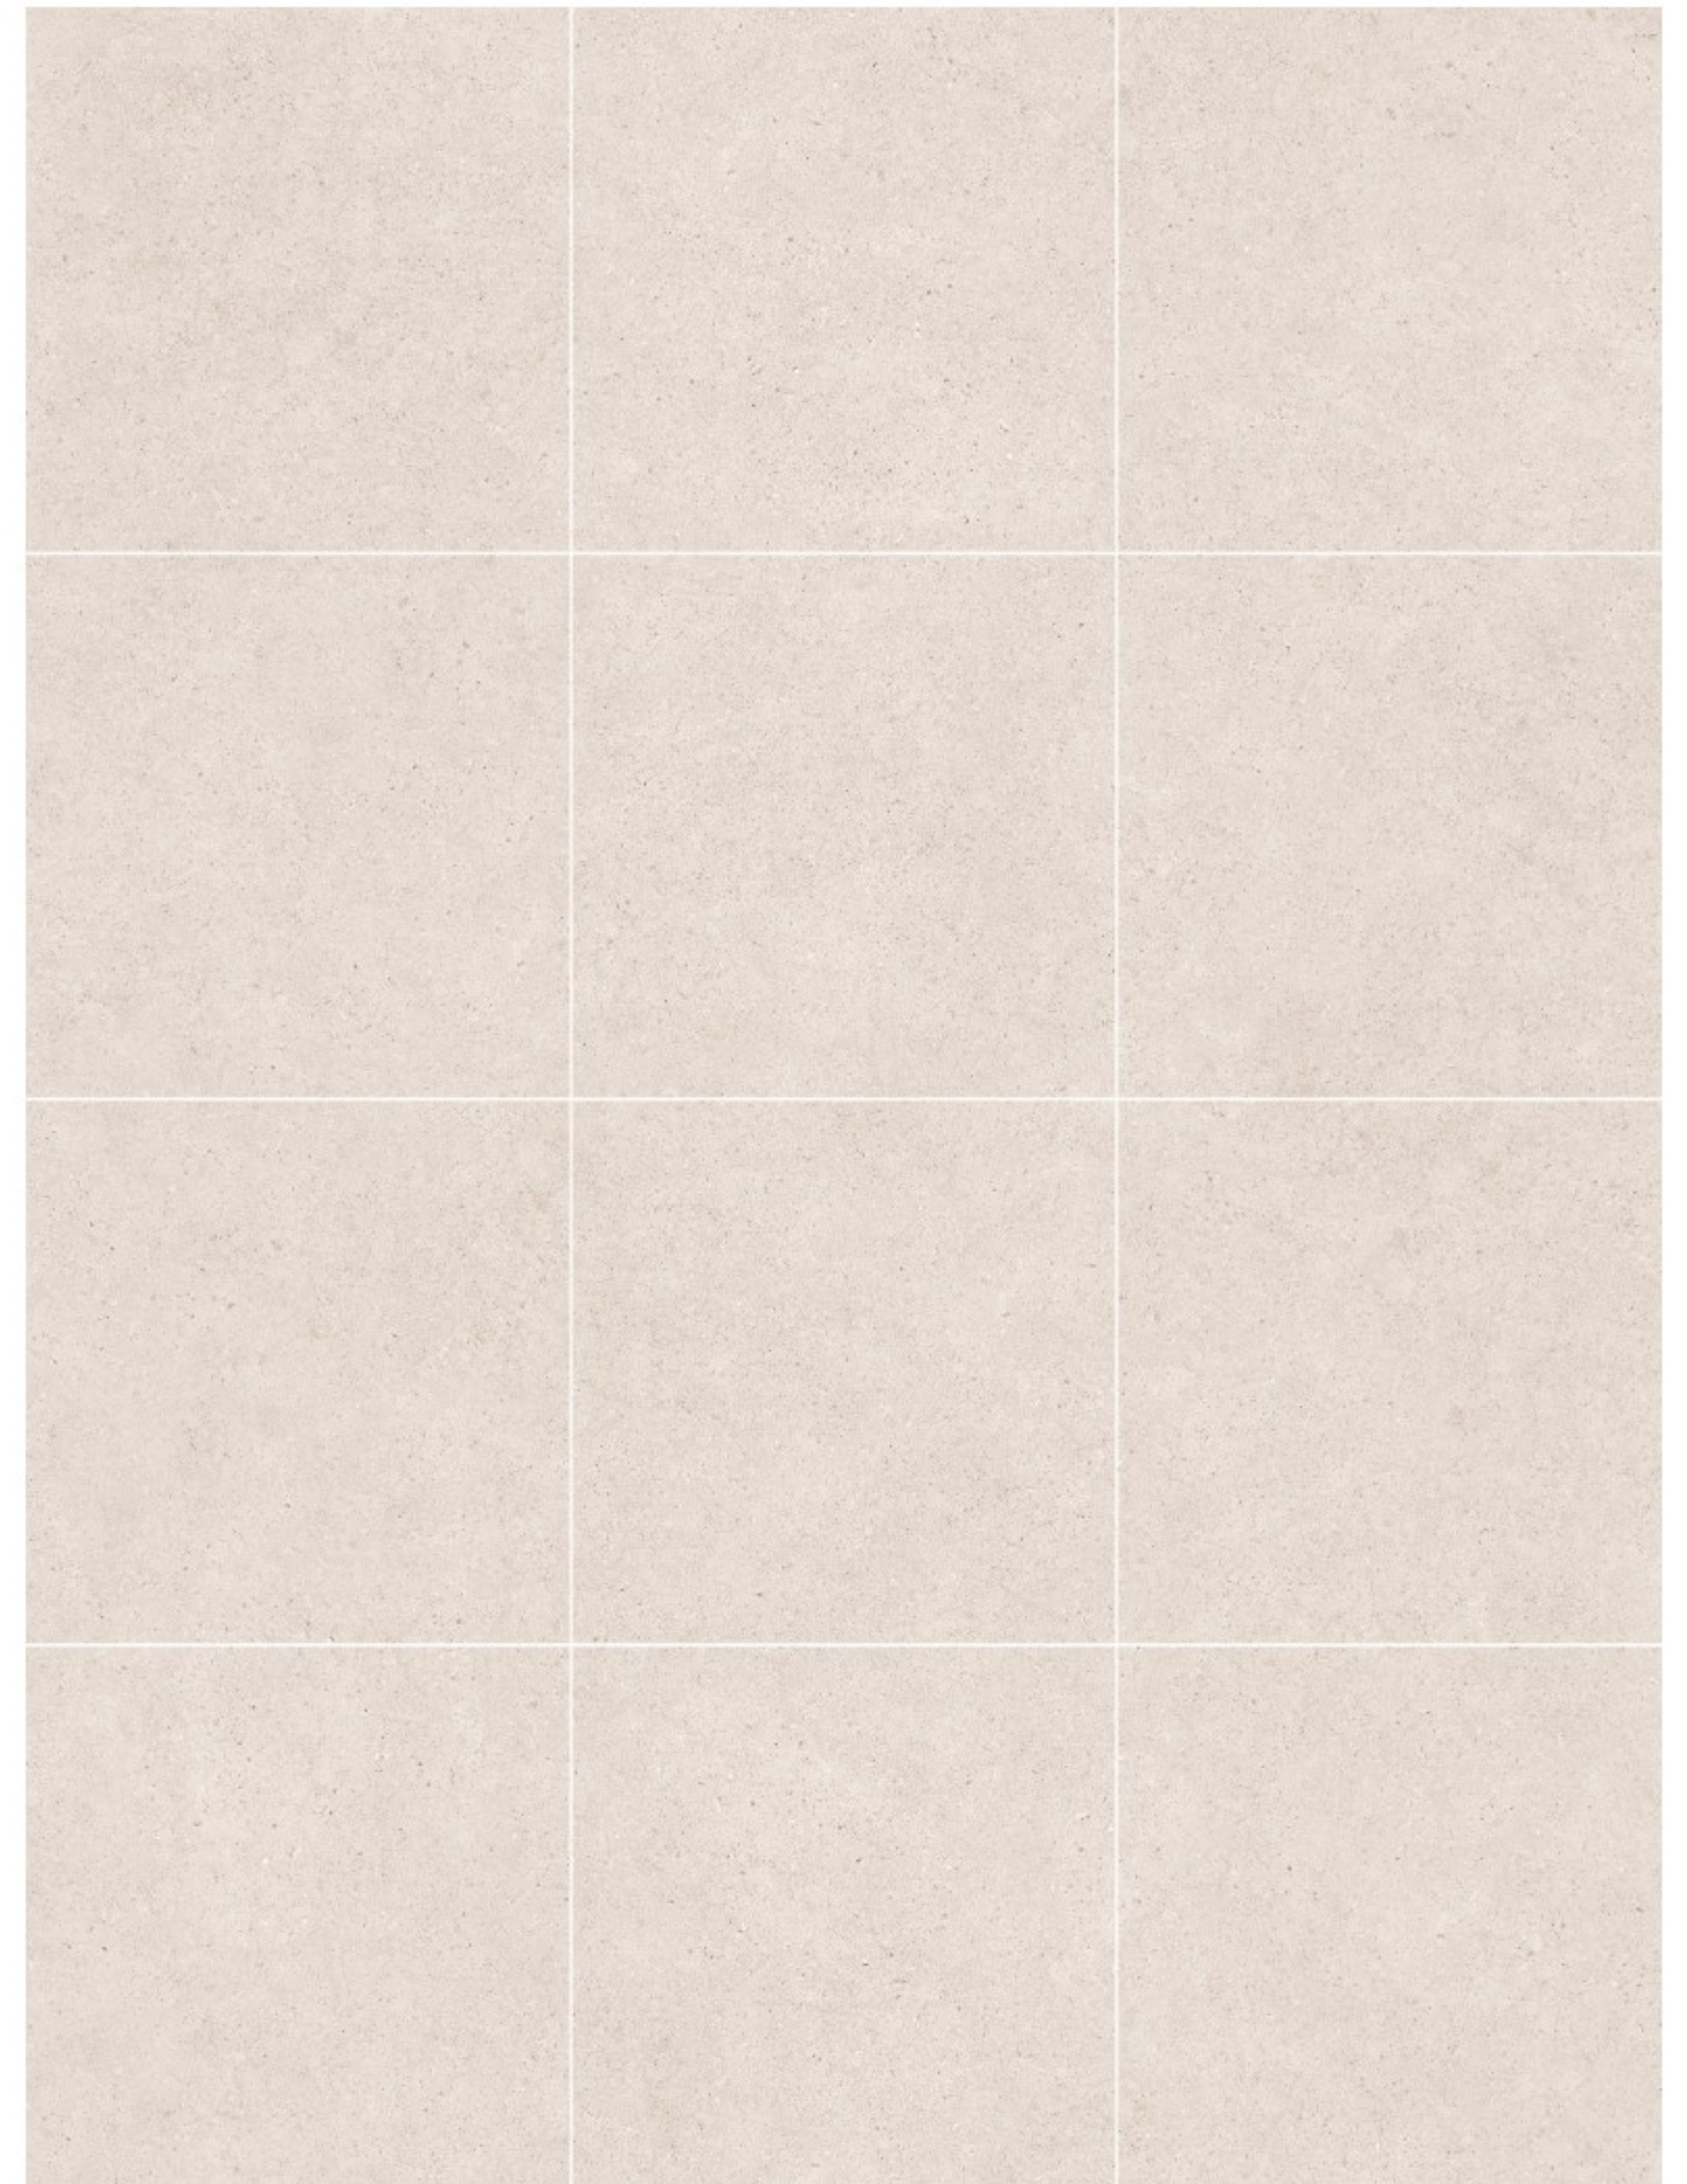



Dijon

Light Grey



Size:

300x300mm / 600x600mm

Finishes:

Matt

Thickness:

≡ 9mm



600x600mm

Mosaic:


300x300mm

12

600x600mm
PATTERNS

Size:
600x600mm

Finishes:
Matt

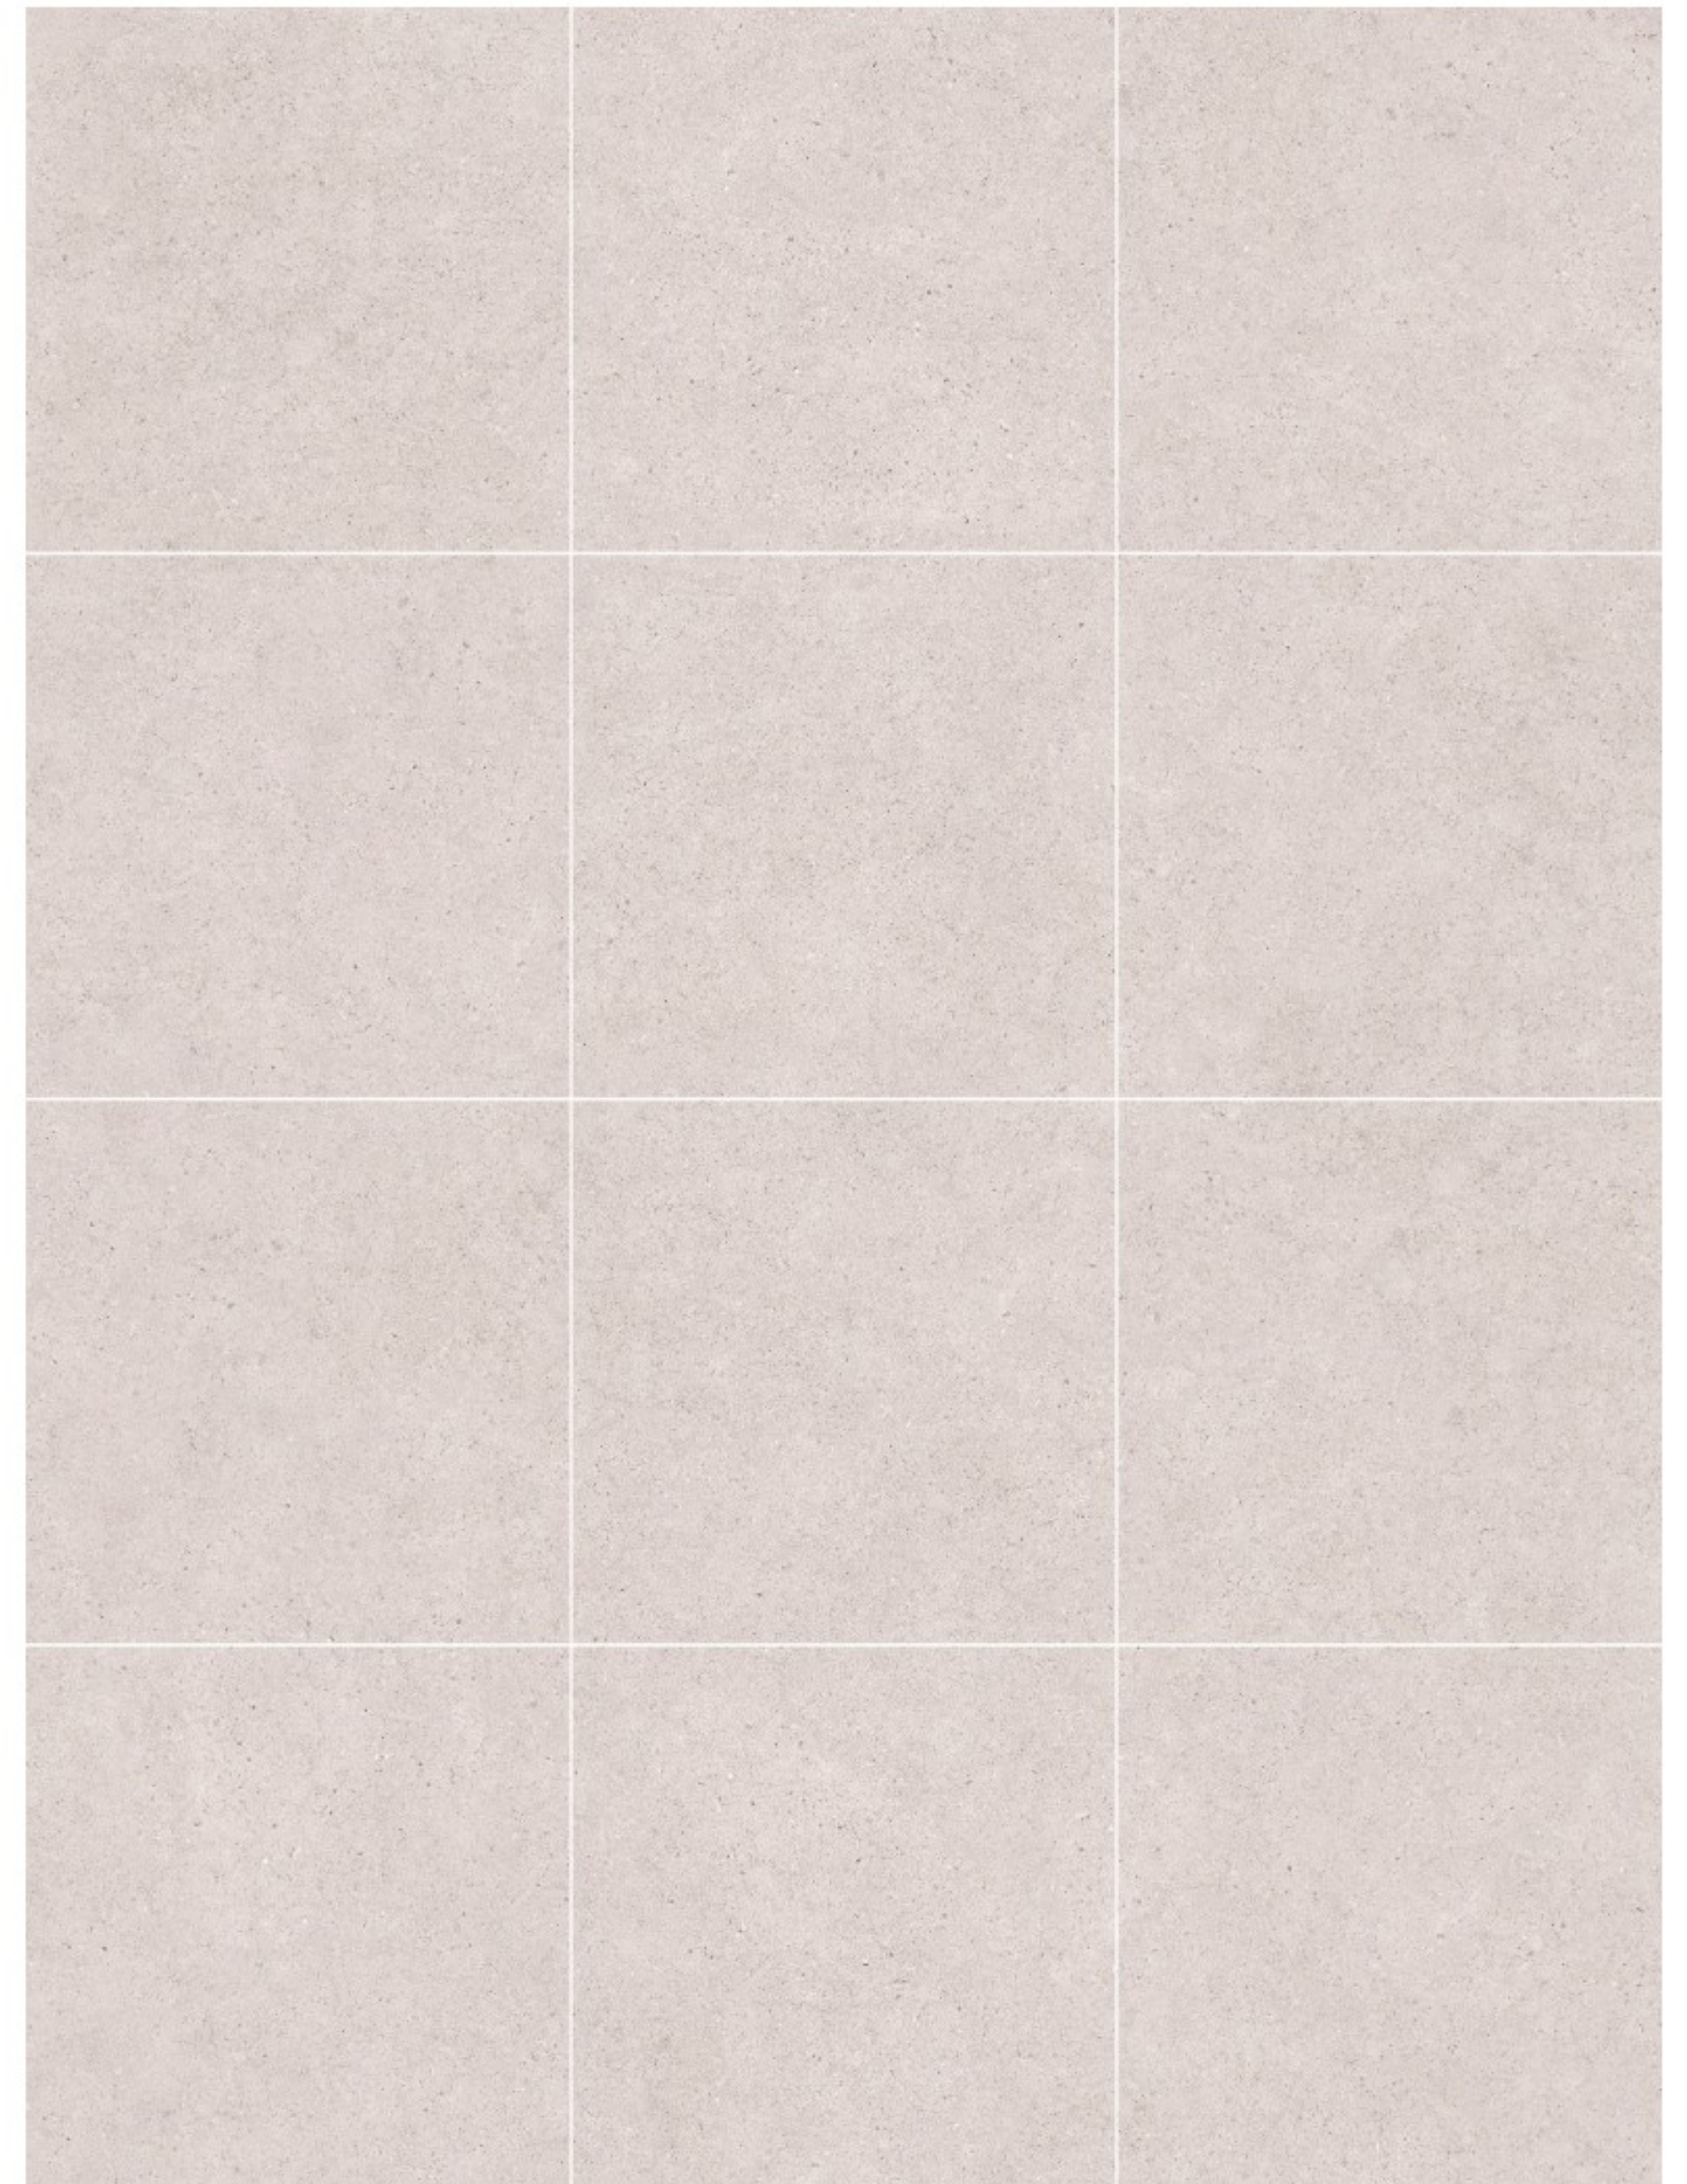



Dijon

Grey



Size:

300x300mm / 600x600mm

Finishes:


Matt

Thickness:

≡ 9mm



600x600mm

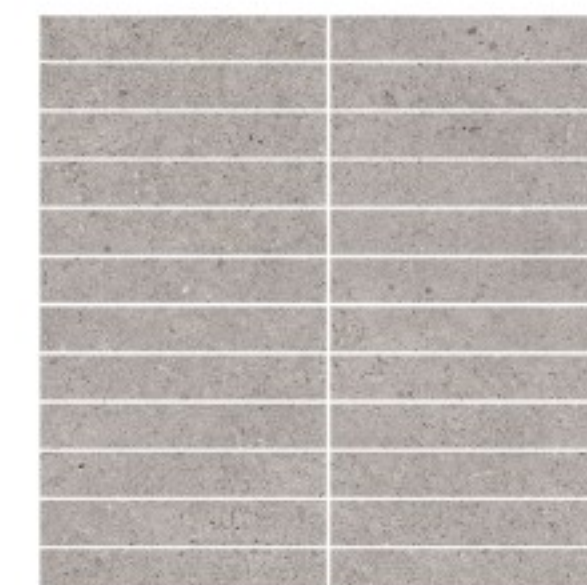Mosaic:


300x300mm

12

600x600mm
PATTERNS

Size:
600x600mm


Finishes:
Matt

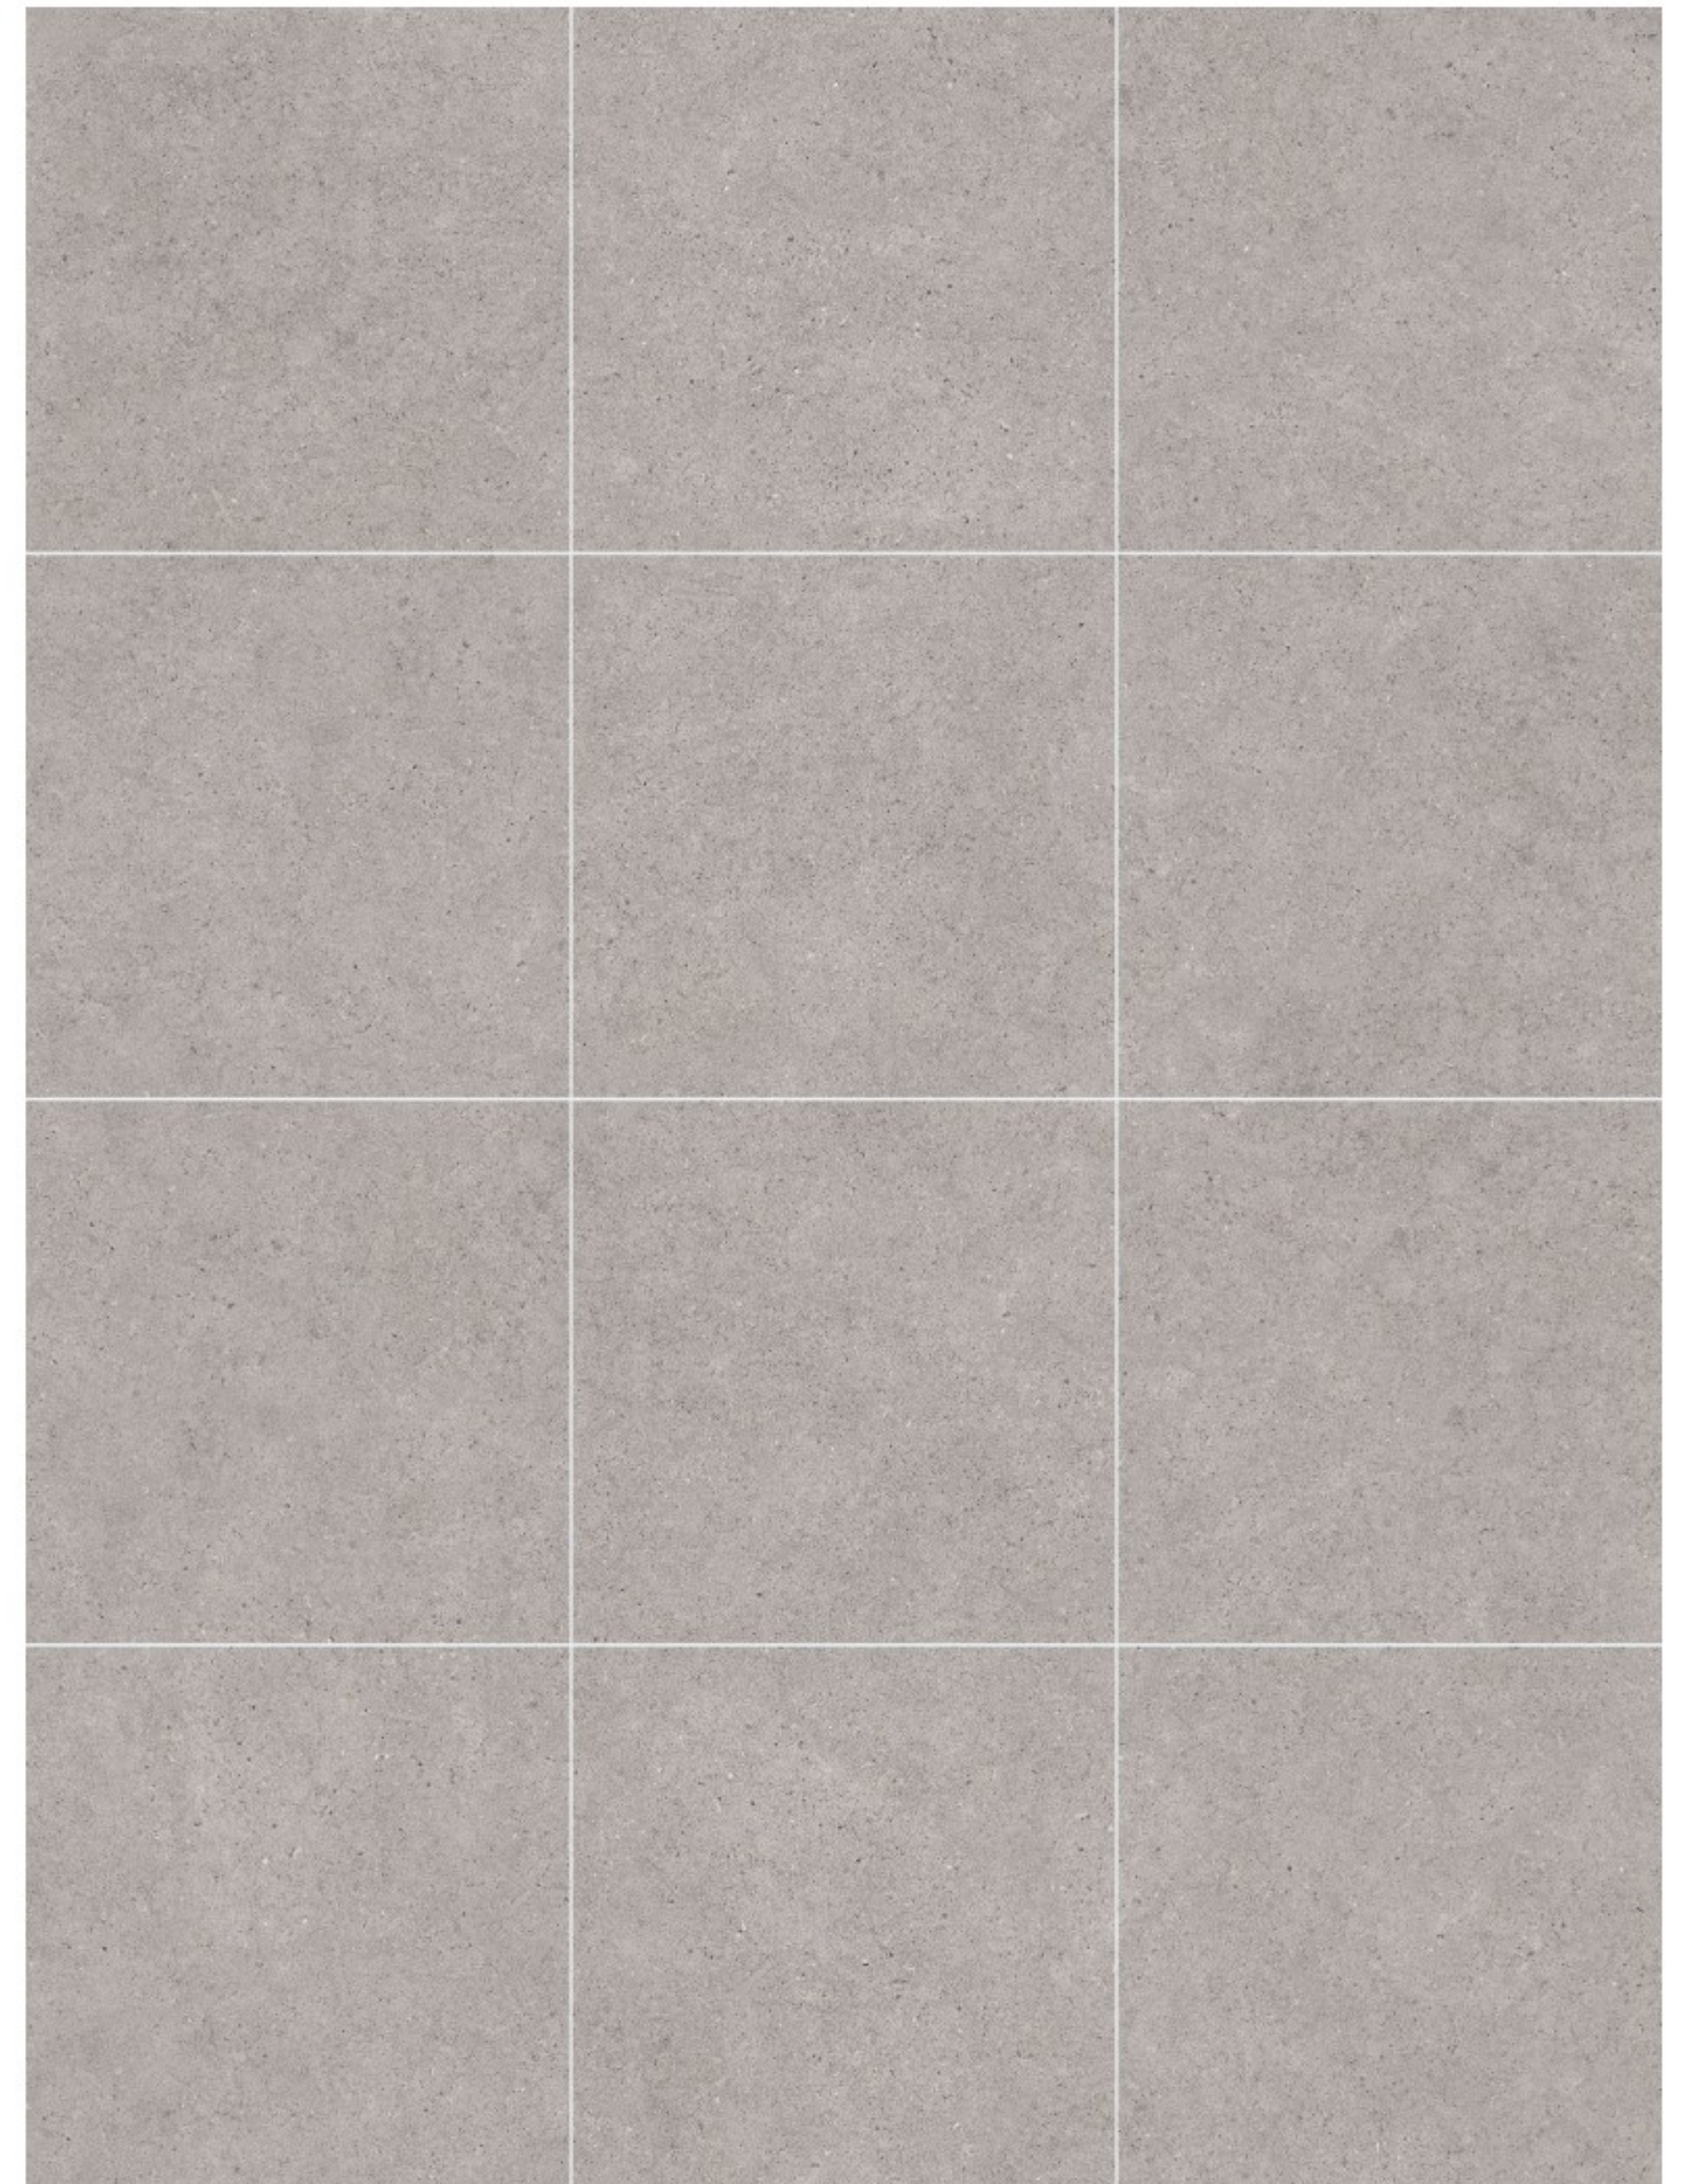



Dijon

Grigio

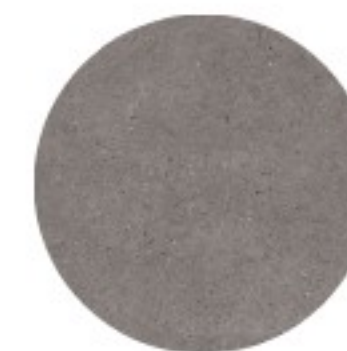

Size:

300x300mm / 600x600mm

Finishes:


Matt

Thickness:

≡ 9mm



600x600mm

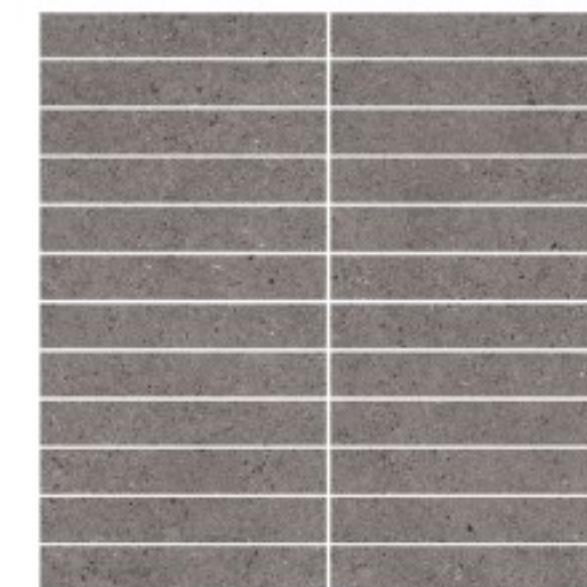Mosaic:


300x300mm

12

600x600mm
PATTERNS

Size:
600x600mm

Finishes:
Matt

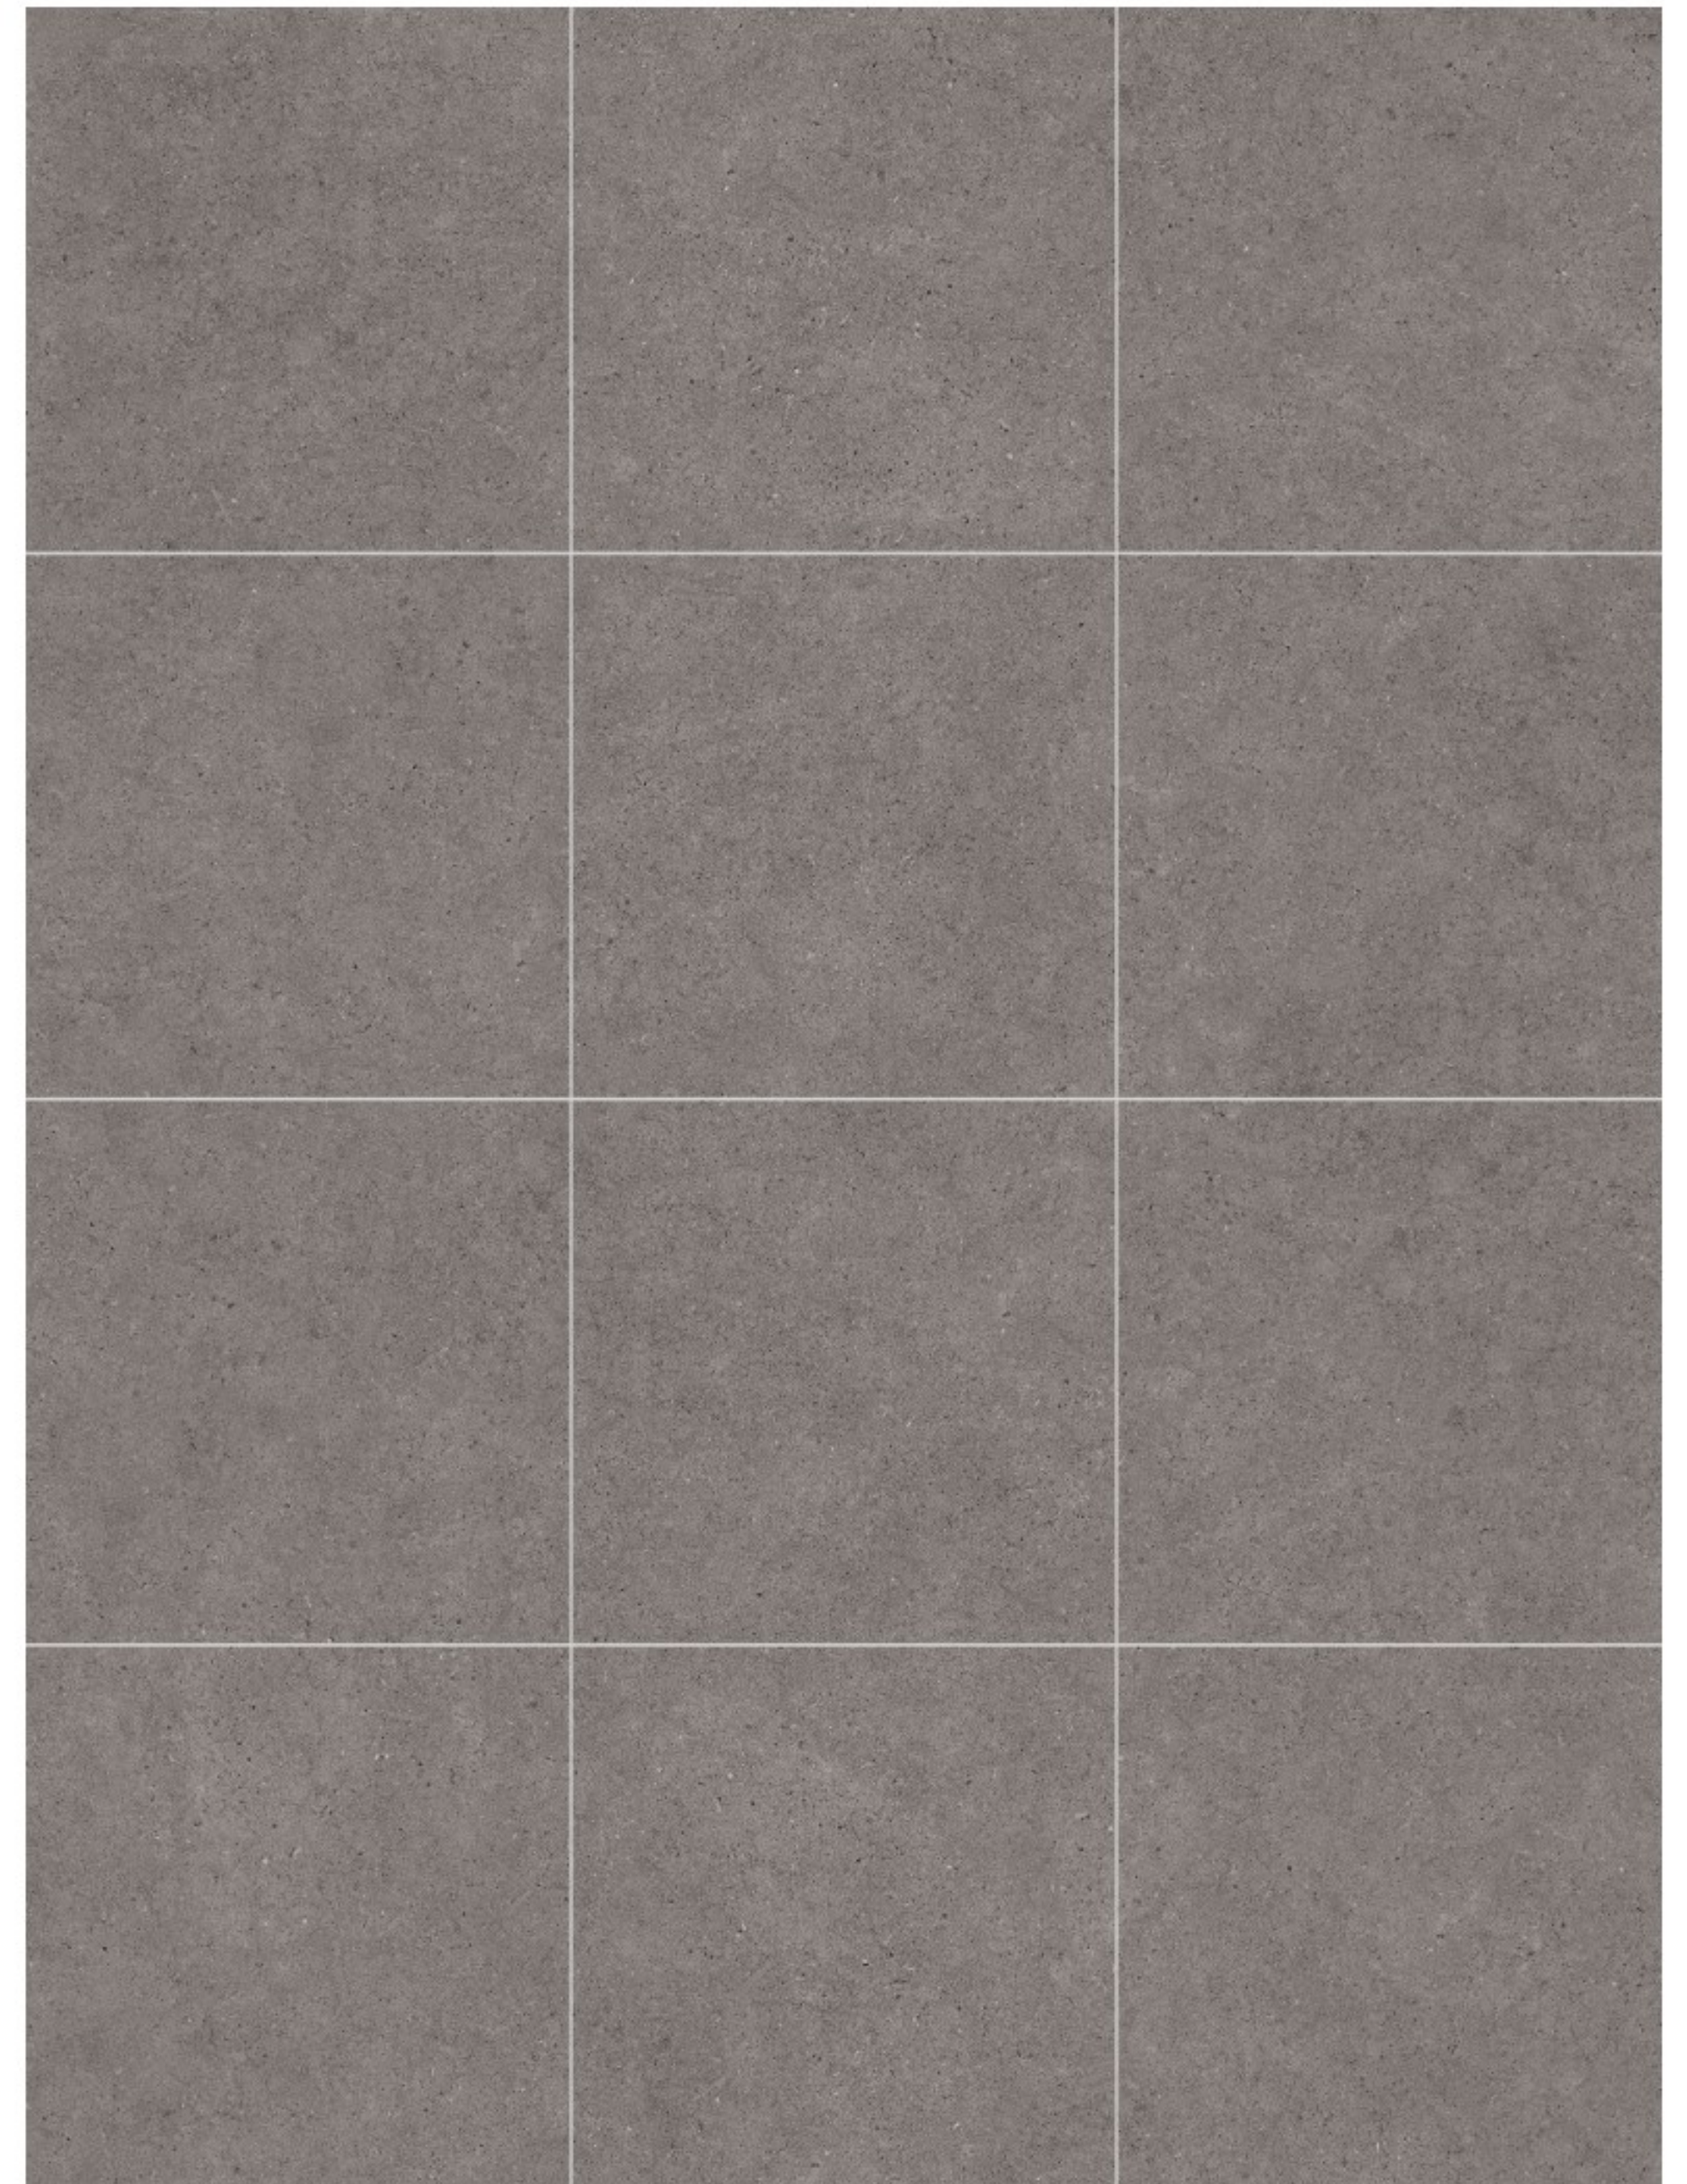

Product



Ivory



Light Grey



Grey



Grigio

SIZE AND THICKNESS

SURFACE	Mosaic	Tiles
	Size:300x300mm Thickness:9mm	Size:600x600mm Thickness:9mm
MATT	●	●

TECHNICAL FEATURES

TECHNICAL FEATURES		TEST METHOD	STANDARD	MANUFACTURERS VALUES
DIMENSIONS AND SURFACE QUALITY				
LENGTH AND WIDTH		EN ISO 10545-2	±0.6%	±0.1%
THICKNESS		EN ISO 10545-2	±5%	±3%
SURFACE QUALITY		EN ISO 10545-2	A minimum of 95% of the tiles shall be free from visible defects that would impair the appearance of a major area of tiles	100%
PHYSICAL PROPERTIES				
WATER ABSORPTION		EN ISO 10545-3	0.5%<E _v ≤ 3%	E ≤ 0.7%
BREAKING STRENGTH		EN ISO 10545-4	≥ 1300N	≥ 1300N
MODULUS OF RUPTURE		EN ISO 10545-4	≥ 35Mpa	≥ 35Mpa
ABRASION RESISTANCE		EN ISO 10545-7	Report abrasion class and cycles passed	Class 4
THERMAL SHOCK RESISTANCE		EN ISO 10545-9	No crazing or peeling after testing	No crazing and peeling
CRAZING RESISTANCE		EN ISO 10545-11	No crazing on glazed surface after testing	No crazing
FROST RESISTANCE		EN ISO 10545-12	No crazing or peeling after testing	No crazing and peelingww
CHEMICAL PROPERTIES				
STAIN RESISTANCE		EN ISO 10545-14	≥ Class 3	Class 5
CHEMICAL RESISTANCE	Low concentration acids & alkalis	EN ISO 10545-13	GLA, GLB, GLC	GLA
	High concentration acids & alkalis		GHA, GHB, GHC	GHA
	Household chemicals and swimming pool slats		Minimum GB	GA