



French Stone

90+



griffiths

China, Level 2, Building 2, Kweichow Industrial Park No. 60, West
Langbao Road, Foshan City, Guangdong Province, P.R. China



60FR01
600x600mm
OFF-WHITE



60FR02
600x600mm
BEIGE



60FR07
600x600mm
NEUTRAL GREY



60FR09
600x600mm
DARK GREY



Romance and Feelings

The romantic heritage of France includes the beauty of retro images, and perfectly blends the different styles of clouds, mud and stone textures, bringing out the best in a small world.

Twenty Faces

Brush polish technology, bring surface of the product into the traces of life, showing a sense of calm and modern, which is a precipitation of fashion



FLOOR/60FR01
WALL/60FR01



60FR01
Off-white

The low porosity and saturation of off-white is fashionable and especially soft. Natural light effect permeates decomposition, full of healing sense conveying all pleasure mood.



FLOOR/60FR01
WALL/60FR01



WALL / 60FR02

60FR02
Beige

The color of this tile is simple, pure, agile, tonality,
gentle and exquisite with tile grain,
giving more beautiful feeling below natural light.



FLOOR/60FR02
WALL/60FR02




FLOOR/60FR07
WALL/60FR07




60FR07
Neutral grey

The low-key color of grey, conveying the sense of hierarchy, proportion, the natural texture has create a natural atmosphere, and the random degree of texture has embodied space with intangible sense.

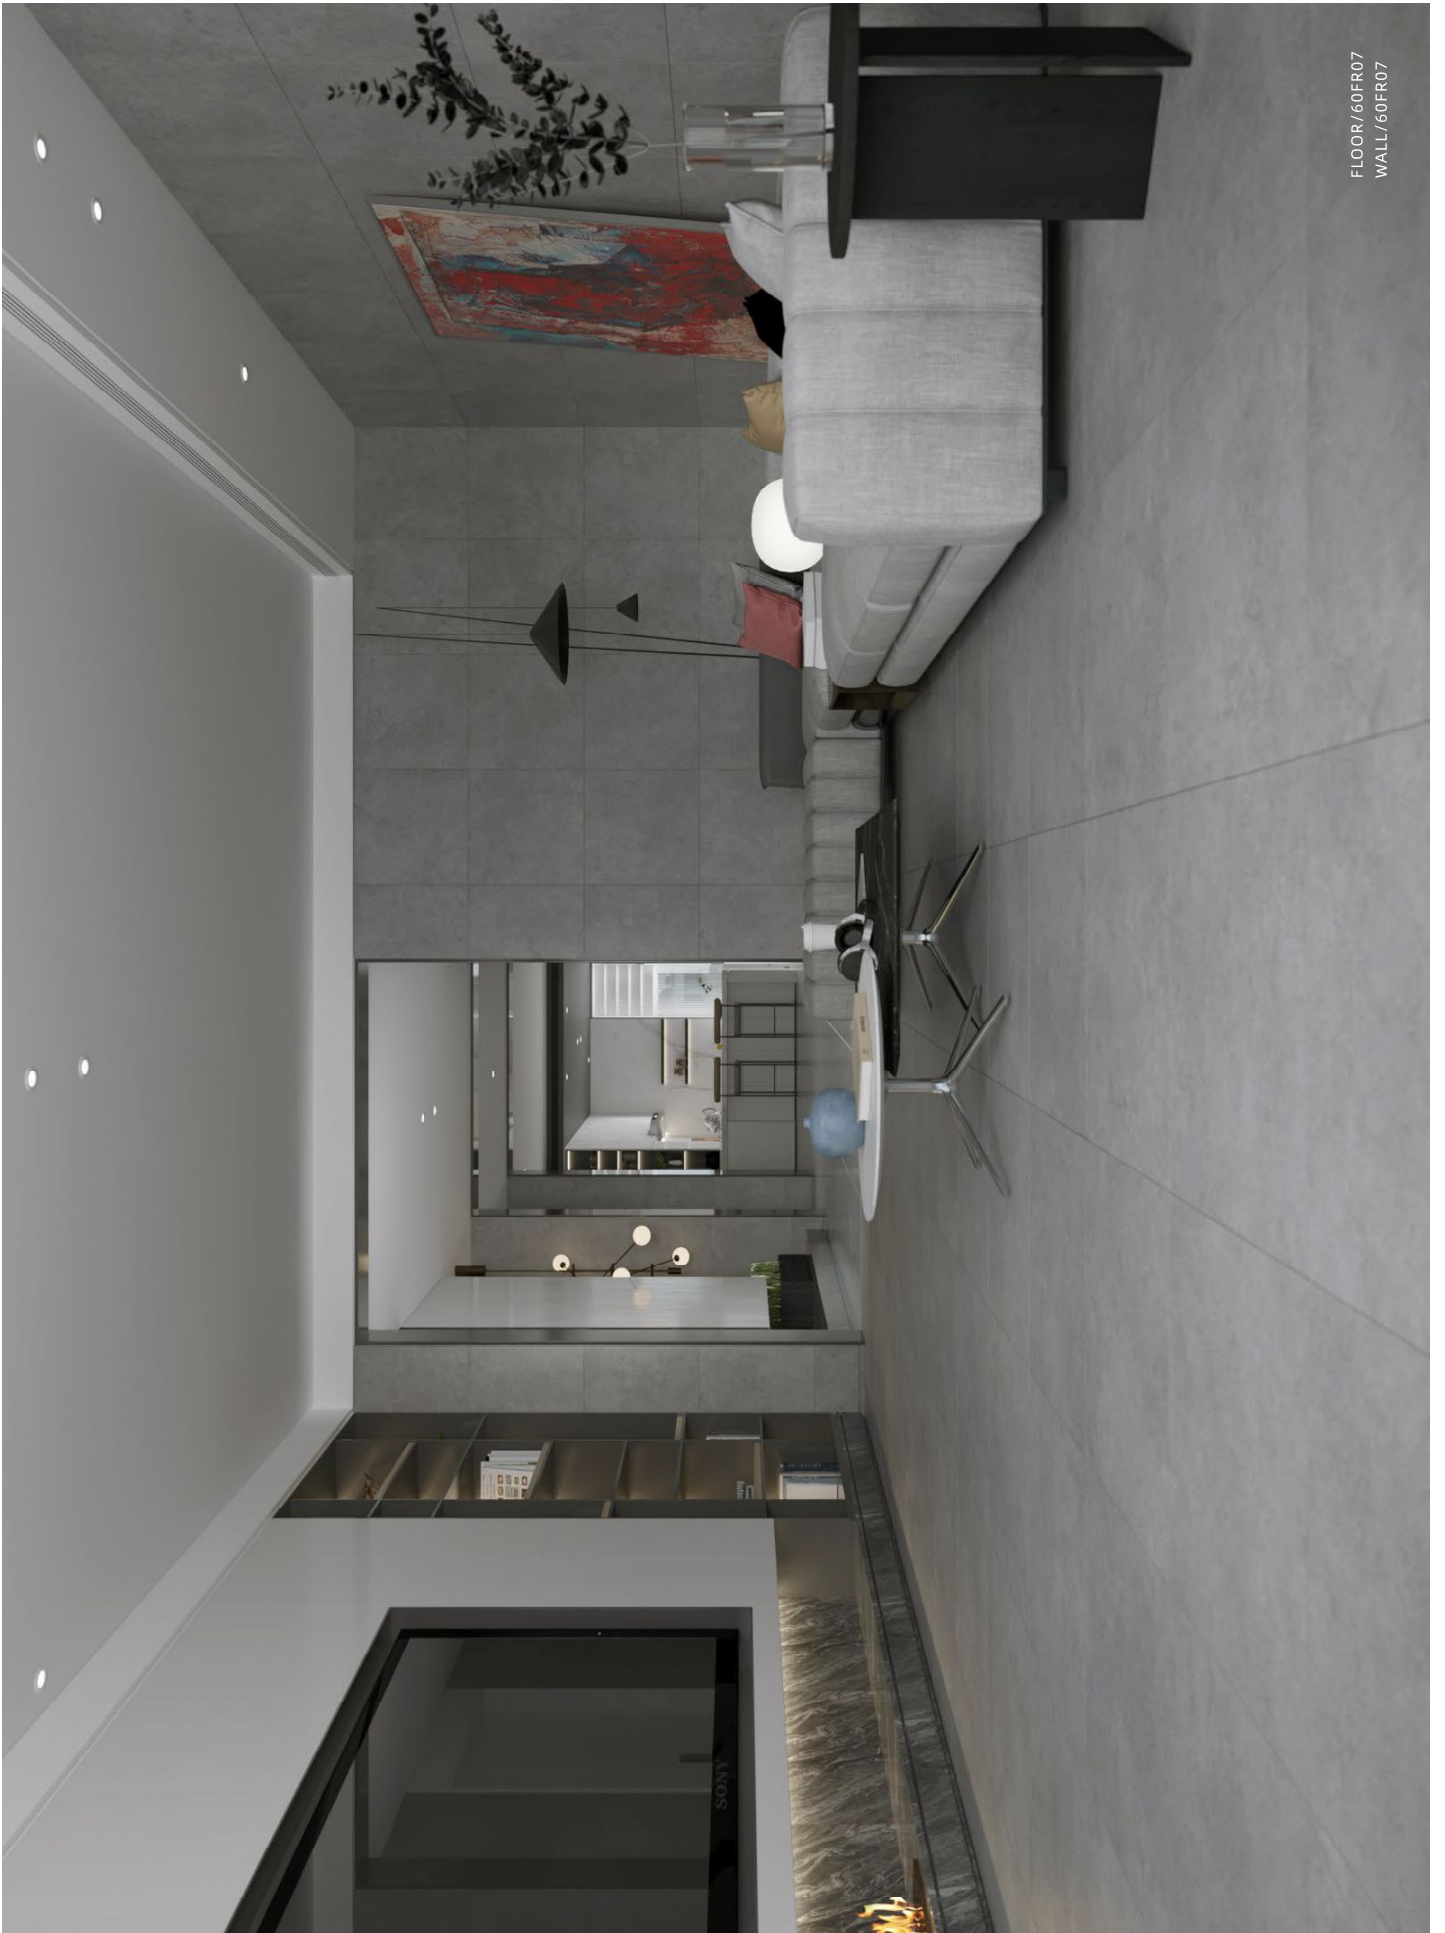

FLOOR/60FR07
WALL/60FR07

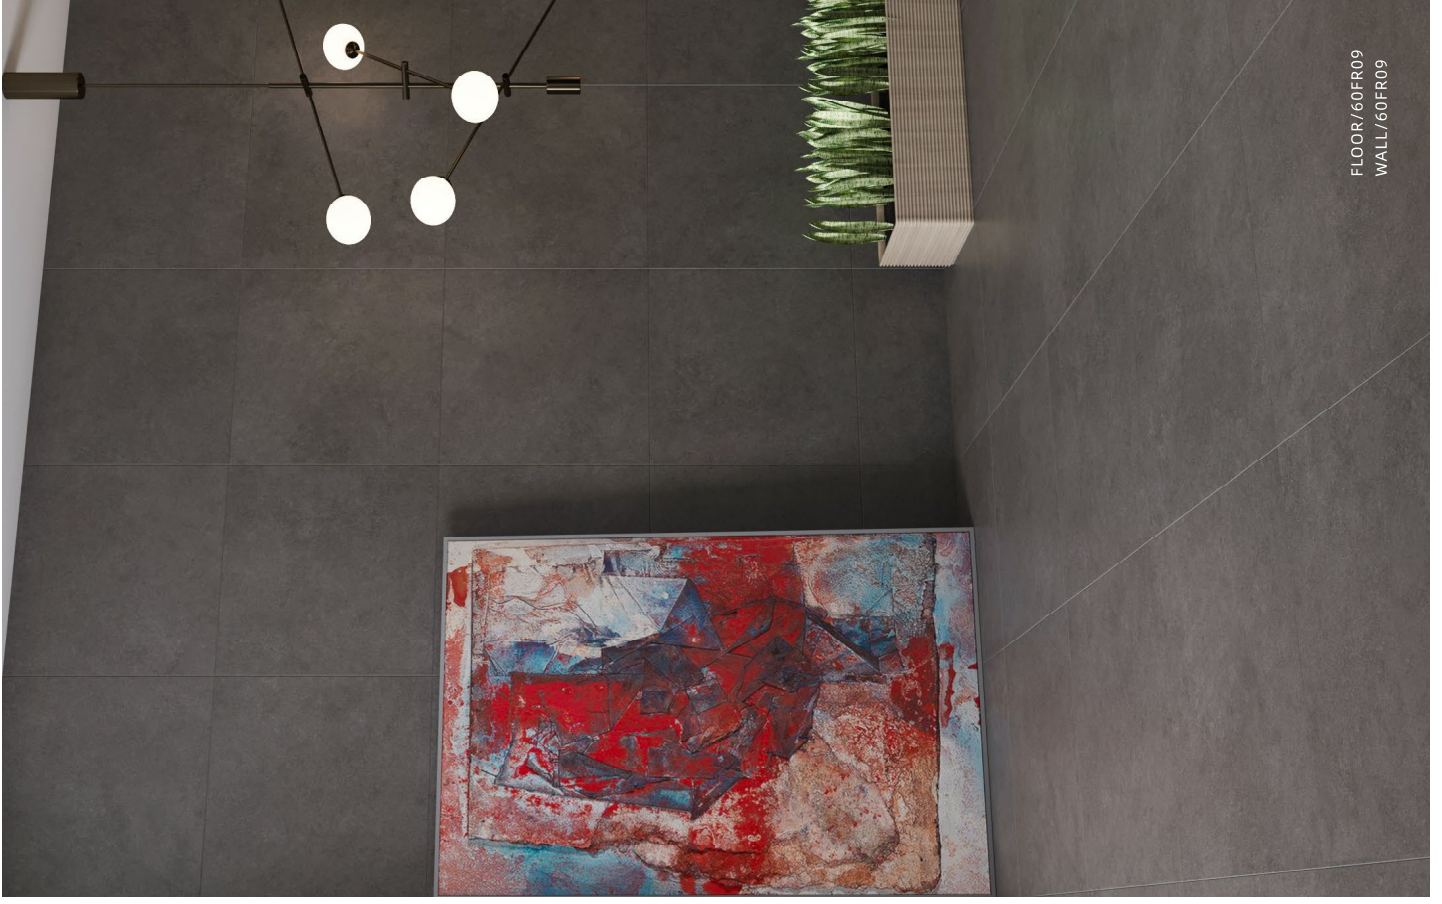

FLOOR/60FR09
WALL/60FR09

60FR09
Dark grey

The pattern of grain shows self-confidence,
easy individual character, or exquisite or elegant,
or wild or elegant.
Can highlight the dynamic space, but also in the visual extension of space.



PRODUCT FEATURE / SURFACE / APPLICATION / INSTALLATION GUIDANCE

THICKNESS	RECTIFIED	GRIP	WALL TILES	FLOOR TILES	COLORS	SIZES	SURFACES

TECHNICAL SPECIFICATION

MEASUREMENT AND SURFACE APPEARANCE	STANDARD PRESCRIBED VALUES	90° VALUES
Dimensions & Surface Quality		
Length and Width	±0.6% max.	-0.03-0.03%
Thickness	±5% max.	9.4-9.6mm
Orthogonality	±0.5% max.	-0.06-0.07%
Straightness of sides	±0.5% max.	-0.06-0.07%
Surface flatness	±0.5% max.	-0.04-0.06%
Breaking strength	> 1300N	2265N
Bending resistance	> 35N/mm ²	51N/mm ²
Resistance to deep abrasion	< 175mm ³	Class 3
Temperature shock resistance	No visible crack	No visible crack
Resistance to frost	No visible crack	No visible crack
Non-slip	R9-R13	R9-R13
Colour resistance to light	no colour changes	no colour changes
Chemical Properties		
Chemical resistance	no visible changes when subjected to chemicals	Durable
Resistance to staining	> 3	Class 5

PACKING DETAILS

SIZES	SURFACE	PCS/CTN	M ² /CTN	CTNS/PLT	M ² /PLT	KG/CTN
600x600mm	✓	4	1.44	26	57.6	40


AVAILABLE SIZES



INSTALLATION GUIDANCE

THICKNESS	RECTIFIED	GRIP	WALL TILES	FLOOR TILES	COLORS	SIZES	SURFACES

ALL FACES

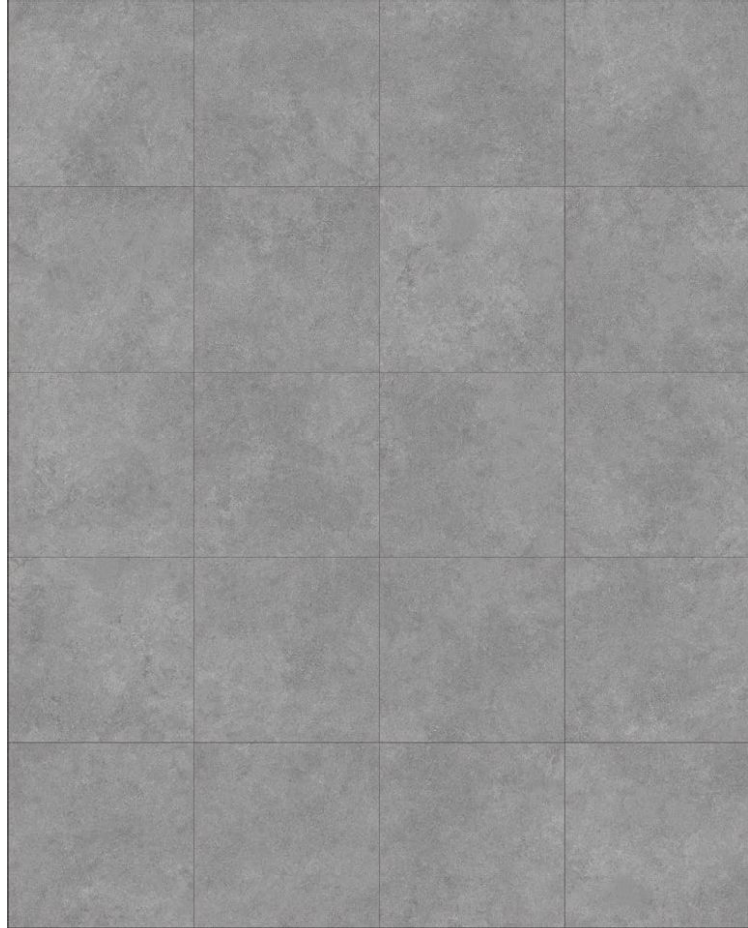

60FR07


COLOURS



OFF WHITE
60FR01
600x600mm



BEIGE
60FR02
600x600mm



NEUTRAL GREY
60FR07
600x600mm



DARK GREY
60FR09
600x600mm