

Taj Mahal





12

600x1200mm
PATTERNS


Size:
600x1200mm

Finishes:
Silktec




FINISHES:
Silktec

Size:




600x1200mm




600x600mm

Thickness:



9mm



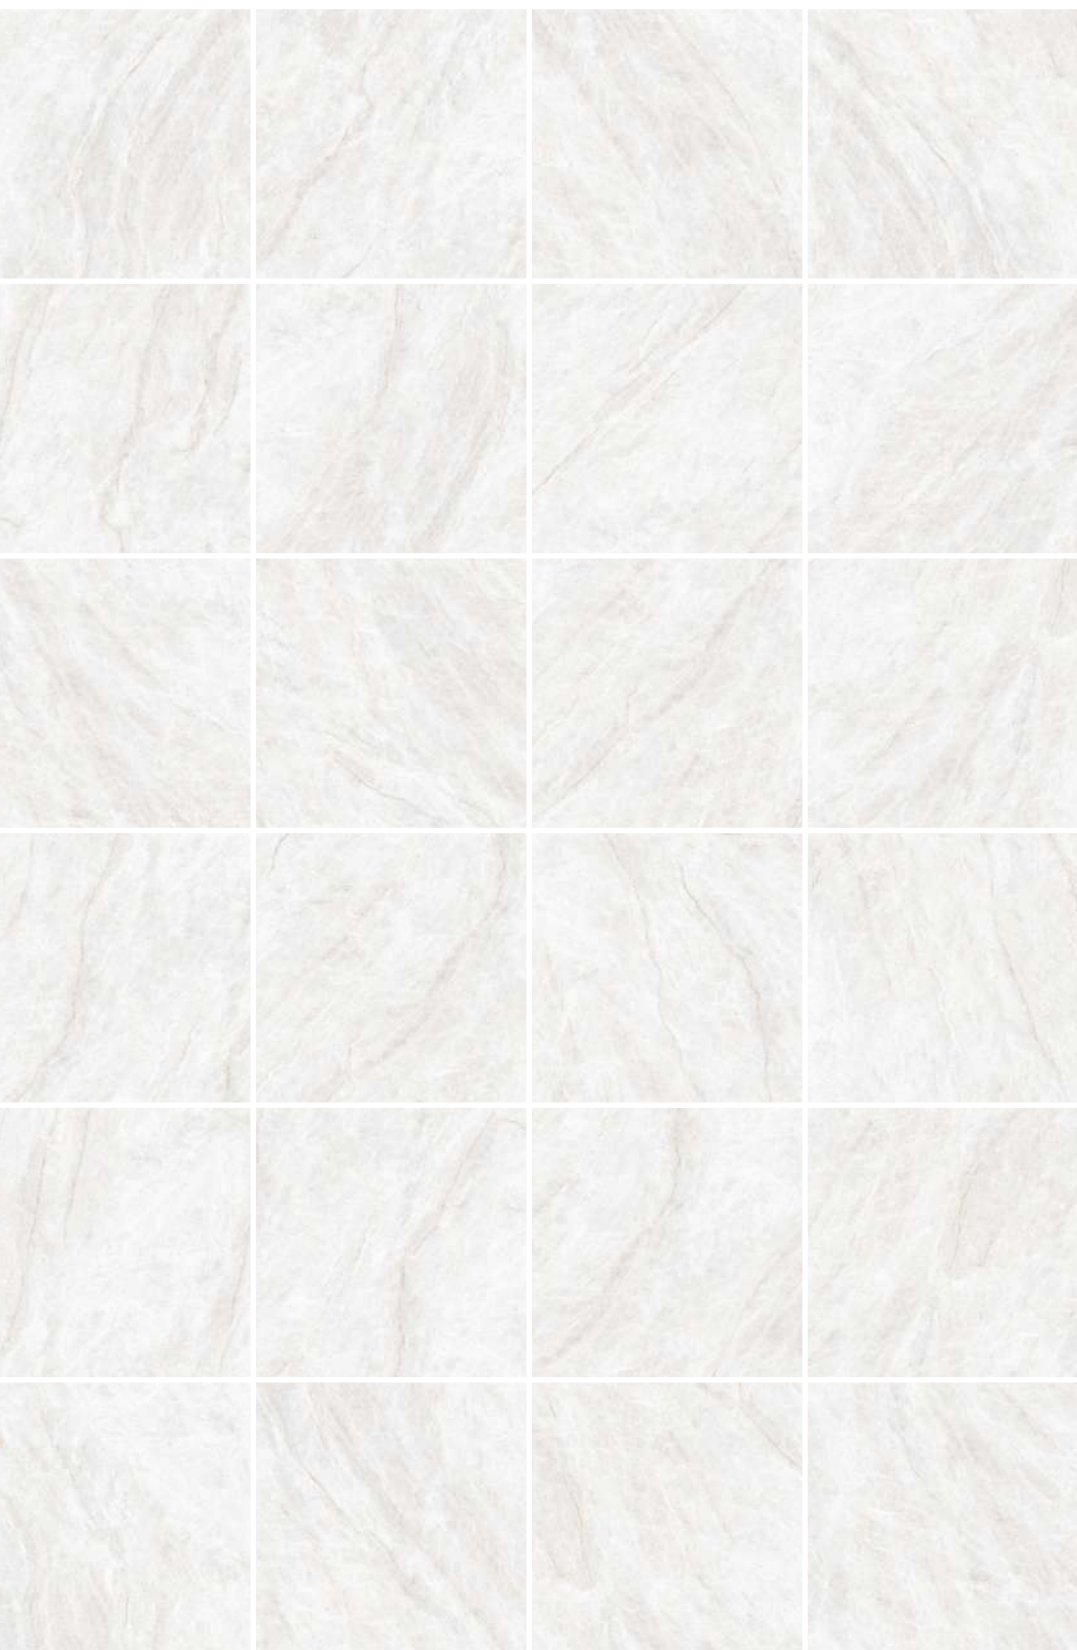

24

600x600mm
PATTERNS

Size:
600x600mm

Finishes:
Silktec



Taj Mahal

SIZE AND THICKNESS

SURFACE

Size:
600x1200mm

Thickness:
9mm

Size:
600x600mm

Thickness:
9mm

SILKTEC



TECHNICAL FEATURES		TEST METHOD	STANDARD	ESTRELLA VALUES
DIMENSIONS AND SURFACE QUALITY				
LENGTH AND WIDTH		EN ISO 10545–2	±0.6%	±0.1%
THICKNESS		EN ISO 10545–2	±5%	±3%
SURFACE QUALITY		EN ISO 10545–2	A minimum of 95% of the tiles shall be free from visible defects that would impair the appearance of a major area of tiles	100%
PHYSICAL PROPERTIES				
WATER ABSORPTION		EN ISO 10545–3	E ≤ 0.5%	E ≤ 0.5%
BREAKING STRENGTH		EN ISO 10545–4	≥ 1300N	≥ 1300N
MODULUS OF RUPTURE		EN ISO 10545–4	≥ 35Mpa	≥ 35Mpa
ABRASION RESISTANCE		EN ISO 10545–7	Report abrasion class and cycles passed	Class 4
THERMAL SHOCK RESISTANCE		EN ISO 10545–9	No crazing or peeling after testing	No crazing and peeling
CRAZING RESISTANCE		EN ISO 10545–11	No crazing on glazed surface after testing	No crazing
FROST RESISTANCE		EN ISO 10545–12	No crazing or peeling after testing	No crazing and peelingww
CHEMICAL PROPERTIES				
STAIN RESISTANCE		EN ISO 10545–14	≥ Class 3	Class 5
CHEMICAL RESISTANCE	Low concentration acids & alkalis	EN ISO 10545–13	GLA, GLB, GLC	GLA
	High concentration acids & alkalis		GHA, GHB, GHC	GHA
	Household chemicals and swimming pool slats		Minimum GB	GA


Yamuna





FINISHES:
Silktec

Size:




600x1200mm



600x600mm

Thickness:



9mm

12 600x1200mm
PATTERNS

Size:

600x1200mm

Finishes:

Silktec







24

600x600mm
PATTERNS

Size:
600x600mm

Finishes:
Silktec



Yamuna

SIZE AND THICKNESS

SURFACE

Size:
600x1200mm

Thickness:
9mm

Size:
600x600mm

Thickness:
9mm

SILKTEC



TECHNICAL FEATURES		TEST METHOD	STANDARD	ESTRELLA VALUES
DIMENSIONS AND SURFACE QUALITY				
LENGTH AND WIDTH		EN ISO 10545–2	±0.6%	±0.1%
THICKNESS		EN ISO 10545–2	±5%	±3%
SURFACE QUALITY		EN ISO 10545–2	A minimum of 95% of the tiles shall be free from visible defects that would impair the appearance of a major area of tiles	100%
PHYSICAL PROPERTIES				
WATER ABSORPTION		EN ISO 10545–3	E ≤ 0.5%	E ≤ 0.5%
BREAKING STRENGTH		EN ISO 10545–4	≥ 1300N	≥ 1300N
MODULUS OF RUPTURE		EN ISO 10545–4	≥ 35Mpa	≥ 35Mpa
ABRASION RESISTANCE		EN ISO 10545–7	Report abrasion class and cycles passed	Class 4
THERMAL SHOCK RESISTANCE		EN ISO 10545–9	No crazing or peeling after testing	No crazing and peeling
CRAZING RESISTANCE		EN ISO 10545–11	No crazing on glazed surface after testing	No crazing
FROST RESISTANCE		EN ISO 10545–12	No crazing or peeling after testing	No crazing and peelingww
CHEMICAL PROPERTIES				
STAIN RESISTANCE		EN ISO 10545–14	≥ Class 3	Class 5
CHEMICAL RESISTANCE	Low concentration acids & alkalis	EN ISO 10545–13	GLA, GLB, GLC	GLA
	High concentration acids & alkalis		GHA, GHB, GHC	GHA
	Household chemicals and swimming pool slats		Minimum GB	GA